

Art. 732


Ugello contagocce in ottone e spia in plexiglass con vite di regolazione.
Questo dispositivo insieme al distributore d'olio elettrico ns. art. 731 permette una lubrificazione centralizzata adatta a macchine agricole, macchine utensili etc.
Gli ugelli contagocce possono essere installati uno di fianco all'altro per la lubrificazione simultanea di più punti.
Ogni ugello può essere regolato in modo differente a seconda delle necessità.

*Brass oil dripper and plexiglass inspection glass with screw adjustment.
The metering spindles with the electric oil dispenser our Art. 731 allow a centralized lubrications system for agriculture machine, general machine-tool etc.
For the simultaneous supply of several lubricating points, the metering spindle can be connected in one supply line one behind the other.
Every spindle can be adjusted in a different way.*

Dati tecnici Technical specifications

Attacco
Connection

G1/8

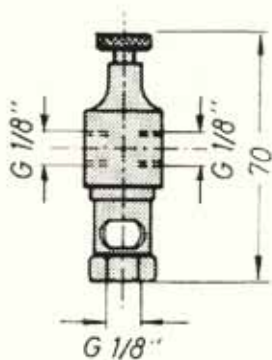

Art. 734

Spazzola tonda per ugello contagocce
Temperatura max. 70°C

*Round oil brush for metering spindle
Max. temperature 70°C*

Art.	Filetto G Thread BSP	A mm	B mm	C mm
734/16	1/8	16	30	53
734/25	1/8	25	45	70
734/30	1/8	30	45	70

Materiale: ottone
Setole: Perlon

*Material: brass
Bristles: Perlon*

